



WATER STORAGE SOLUTIONS



COLUMN

Column has a majestic feel to it with Roman like fluted columns. Available in two sizes, a smaller 300ltr and an imposing 500ltr, the design offers a bold addition to any garden. Available in three colour options:

COL300GR - Green
 COL300G- Grey
 COL300CH - Charcoal


COL500GR - Green
 COL500G- Grey
 COL500CH - Charcoal

CONNECTION POINTS

Pre-marked filter/diverter connection points (Choice of 3.No)

Tap connector at 3/4", 3/4" plastic tap is supplied.

Tank Inter-linking/ Pump Connection point at 3/4"

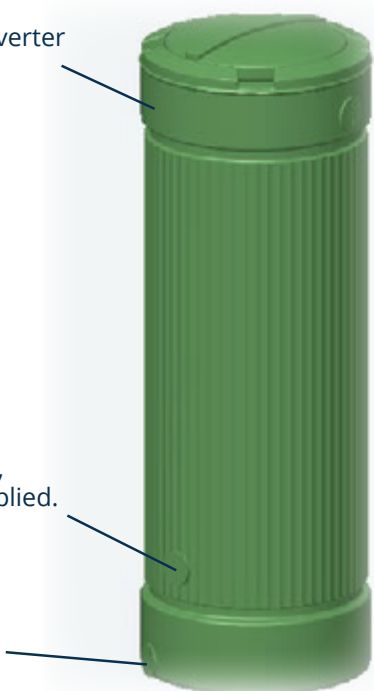

300Ltr:
 (h): 1500mm
 (d): 550mm

500Ltr:
 (h): 1840mm
 (d): 640mm

ACCESSORIES



- **Universal Fit Diverter with Filter** (tank connector and hose) RC2BL, RC2G, RC2WH or RC2B in black, grey, white or brown



- **Universal Fit Diverter with Tap** (tank connector and hose) RC1G, RC1B in grey, or brown



- **Universal Long Link Kits** - 9000123U, 9000123UU2, or 9000123UU5 for the 1, 2 or 5 metres lengths



- **3/4 inch Tank to Tank Connection Kit** - 9000326



- **Hole-saw kit with rubber gommets** required to make hole for tank to tank connector

Delivered free along with the Column waterbutt (otherwise delivery charge of £5 will apply)

INSTALLATION INSTRUCTIONS

To fill the Water Column, we recommend using the our Universal Fit Diverter with Filter.

Where the waterbutt cannot be located within 30cm of the downpipe, ask about our longer Universal Long Link Kits available to order in 1, 2 or 5 metres lengths. Order the closest size above the required length and cut down.

You may also use other UK diverters but you'll need to refer to the instructions for that particular diverter.



1. Setting Up

The Water Column must be situated on firm and level ground.

You will need to position the tank near a downpipe and connect to the downpipe using your Filter Collector Universal or similar rainwater diverter.



2. Attaching the tap

The Water Column comes with a 3/4 inch brass tap. The tap can be screwed into the 3/4" brass threaded tap connector which is at a convenient height for filling a watering can.

Use a little PTFE tape to help seal the tap in its vertical position.



3. Filling with rainwater

The Column can be filled using various rainwater diverters, our Universal Filter diverter is ideal for this purpose.

There are three pre-marked filling points around the top of the tank which can be cut to the required size to fit your Filter/Diverter. Always refer to the instructions supplied with your Filter/Diverter during installation.



4. Connecting tanks

Tanks can be linked together using a connectionset, we recommend the 3P 3/4" tank-to-tank connector (250 mm). Each additional tank needs an 8 mm air vent drilled in the lid to ensure they fill correctly.

Isolation valves can also be used if necessary.



5. Connecting a pump

A pump can be attached to the Column.

Get in touch for further details if this is of interest.



6. Attaching the lid

The 500Ltr Column has a removable lid, whereas the 300Ltr Column has a push-fit lid.

7. Winter Care Precautions

To prevent any damage from being caused, columns must be drained completely and disconnected from the rainwater inlet during freezing weather conditions.