

Non-Combustible Self Leveling Decking Support Pedestals

Product Data Sheet

European Classification (Euroclass) A1 Fire Rated decking pedestal.

Manufactured from steel, it provides a super strong support for decking or flooring joists

Large height-adjustable range available for every application.

- Perfect for terraces, podiums, roof decks, balconies
- Will not crack, split or warp
- · Highly durable zinc nickel finish provides excellent corrosion resistance




Technical Specifications

Product Material	Mild Steel
Finish	Aztec Zinc Nickel corrosion resistant finish
Height Range	NCSL1/D 28-35mm NCSL2/D 34-46mm NCSL3/D 44-62mm NCSL4/D 61-97mm NCSL5/D 95-165mm NCSL6/D 163-300mm NCSL7/D 296-458mm
Compression	1000kg
Base Diameter	100 x 100mm
Max joist width	60mm



PEDESTAL HEAD

Self Leveling pedestal head, Features holes in either side for simple fixing to joists. With locking ring.



UPPER THREADED SECTION

Externally threaded rigid tube, easily allows millimeter perfect adjustment within the given height range.



Internally threaded rigid tube at base for enhanced stability attributes.



Totally flat supporting base evenly spreads the load, protecting membranes and surfaces. Holes enable pedestals to be fixed to surface where applicable.



TEL: +44 (0)1536 383 810 / WEB: www.alumascwms.co.uk / EMAIL: info@alumascwms.co.uk Alumasc Water Management Solutions, Burton Latimer, Kettering, Northants, NN15 5JP

HARMER BUILDING DRAINAGE

Non-Combustible Self Leveling Decking Support Pedestals

System Height Ranges

Product Ref: NCSL


NBS


Product Reference: NCSL - Non combustible Self Leveling Decking Support Pedestal


Material: Mild Steel

Finish: Aztec / Zinc / Nickel corrosion resistant finish Size: 28mm to 458mm Compression: 1000kg



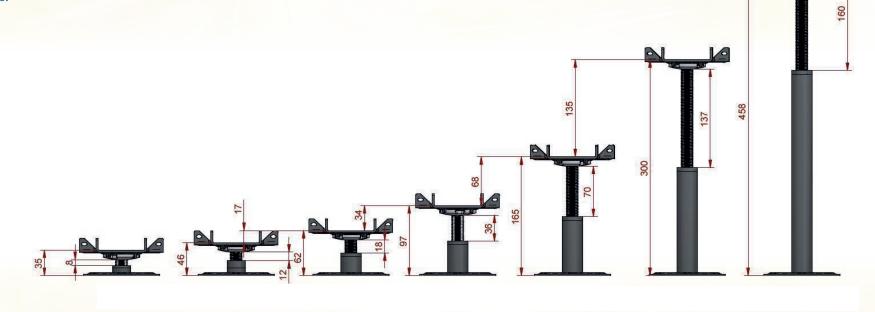



















Non-Combustible Self Leveling Paving Support Pedestals

Product Data Sheet

European Classification (Euroclass) A1 Fire Rated paving pedestal. Manufactured from steel, it provides a super strong support for paving slabs Large height-adjustable range available for every application.

- Perfect for balconies, terraces, podiums & roof decks
- · Will not crack, split or warp
- · Highly durable zinc nickel finish provides excellent corrosion resistance



Technical Specifications

Product Material	Mild Steel
Finish	Aztec Zinc Nickel corrosion resistant finish
Height Range	NCSL1/P 27-35mm NCSL5/P 95-165mm NCSL2/P 34-46mm NCSL6/P 163-300mm NCSL3/P 44-62mm NCSL7/P 296-458mm NCSL4/P 61-97mm
Compression	1000kg
Base Diameter	100 x 100mm
Max joist width	60mm



PEDESTAL HEAD

Rigid pedestal head, welded to upper threaded section provides totally rigid support for decking. Accommodates joists of 50mm. Features holes in either side for simple fixingto joists.



UPPER THREADED SECTION

Internally threaded rigid tube, easily allows millimetre perfect adjustment within the given height range.



Externally threaded rigid tube. Features locking ring, which ensures absolute stability.



Totally flat supporting base evenly spreads the load, protecting membranes and surfaces. Holes enable pedestals to be fixed to surface where applicable.





TEL: +44 (0)1536 383 810 / WEB: www.alumascwms.co.uk / EMAIL: info@alumascwms.co.uk Alumasc Water Management Solutions, Burton Latimer, Kettering, Northants, NN15 5JP

HARMER BUILDING DRAINAGE

Non-Combustible Self Leveling Paving Support Pedestals

System Height Ranges

Product Ref: NCSL

NBS

Product Reference: NCSL - Non combustible Self Leveling Paving Support Pedestal

Material: Mild Steel

Finish: Aztec / Zinc / Nickel corrosion resistant finish Size: 28mm to 458mm Compression: 1000kg



