Wiring Schematic - Single VCD Motor

Please read before starting installation.





It is the responsibility of the installer to ensure that the installation is completed in accordance with all applicable laws, standards and regulations. Any information stated in these instructions is not intended to supersede applicable legislation.

All electrical work should be carried out by a qualified electrician, isolating the power and following all applicable safety precautions.

This system operates at both 230Vac and 24Vdc as indicated. DO NOT exchange the live and neutral wires the resultant of which could cause damage to the controller and / or the motor(s).

Suitable for indoor use only.



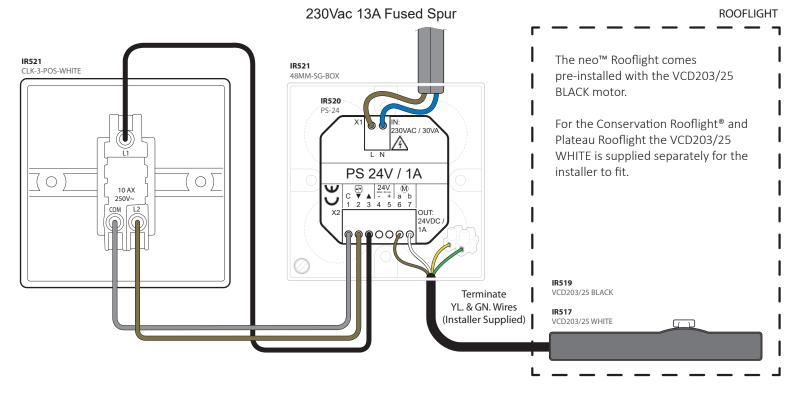



Power Supply:

230Vac / 50Hz / 15VA 24Vdc / 1.0A

Output:

Mode of Operation:

Short-time duty 20% duty cycle

Type of protection: Temperature range:

0°C ... +50°C

For technical support please contact the Rooflight Company